

# *The SuperFortress TRTL30X6*

High Security Burglary and Fire Resistant Safe



**Model TRX5520**

The SuperFortress offers the ultimate in TRTL-30X6 protection. The safe utilizes the newest, most revolutionary technology to form the strongest safe to pass this most severe test. Massive copper plates incorporated into our patented composite material achieving over 40,000 pounds of compression strength, makes this one of the most formidable defensive barriers ever offered.

### ***Door & Body***

The door has a thickness of 8 1/4". The safe has a total body thickness of 4 1/8". High strength alloy and our proprietary barrier material combine to provide multi-layer protection designed to withstand the most sophisticated attack by tools, torch or explosives.

### ***Locks***

UL listed manipulation resistant high strength Group 1 combination lock with spy proof dial is used on all TRTL30X6 safes. A separate high security auxiliary key lock is standard on all models.

### ***Boltwork***

Massive 1 1/2" diameter chromed high tensile steel bolts are driven both horizontally and vertically through reinforced bolt chambers by the safe's three-way boltwork mechanism. The hinge side of the door is protected by a row of dead bolts that fit into similar reinforced bolt chambers.

### ***Glass Relockers***

A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate thereby preventing the safe from being opened.


### ***Interior***

All models are supplied with adjustable shelves.

### ***Options available***

- UL listed electronic digital locks
  - Time locks
- Inner Compartments/lockers

*Independently tested by UL for your peace of mind.*

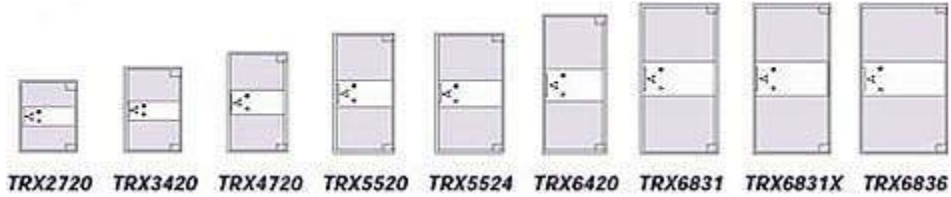

**Specifications**

Model	Interior Dimensions (in)			Exterior Dimensions (in)			Capacity (ft3)	Weight (lbs)
	height	width	depth	height	width	depth		
TRX2720	27	20	16	35.25	28.25	28.25	5.0	2,260
TRX3420	34	20	23	42.25	28.25	35.25	9.1	3,125
TRX4720	47	20	23	55.25	28.25	35.25	12.5	3,500
TRX5520	55	20	23	63.25	28.25	35.25	14.6	4,100
TRX5524	55	24	20	63.25	32.25	32.25	15.3	4,400
TRX6420	64	20	23	72.25	28.25	35.25	17.0	4,700
TRX6831	68	31	16.75	76.25	39.25	29	20.4	5,900
TRX6831X	68	31	19.75	76.25	39.25	32	24.1	6,100
TRX6836	68	36	26	76.25	44.25	38.25	36.8	7,000

Add 2 in. to depth for handle projection. All specifications are approximate and subject to change without notice.

**Note:** The best protection is a safe tailored to your needs and cash risk. Consultation with a security professional is advised.

Door Swing Dimensions (in)		
Model	A	B
TRX2720	52.5	49
TRX3420	61.75	53
TRX4720	61.75	53
TRX5520	61.75	53
TRX5524	62.75	61
TRX6420	61.75	53
TRX6831	66.5	75
TRX6831X	69.5	75
TRX6836	80.5	85

\* add 2 inches to outside depth for handle and hinges

# EMPIRESAFE

[www.empiresafe.com](http://www.empiresafe.com)

6 East 39<sup>th</sup> Street • New York, NY 10016

Tel (212) 684-2255 • (800) 543-5412 • Fax (212) 684-5550

---

Diamond/Jewelry Safes • Modular Vaults • Vault Doors • Money Safes • Cash Drop Safes • Residential Safes • Media & Record Safes • Insulated Files • Bank Equipment • Safe Deposit Boxes • Bullet Resistant Equipment • Metal & Weapon Detectors • Safes Opened • Repaired • Bought • Traded • Stored • Moved • Combinations Changed