


Bischoff



The Bischoff Safe & Electro Security Group

THE BISCHOFF GOLF TL15 SAFE

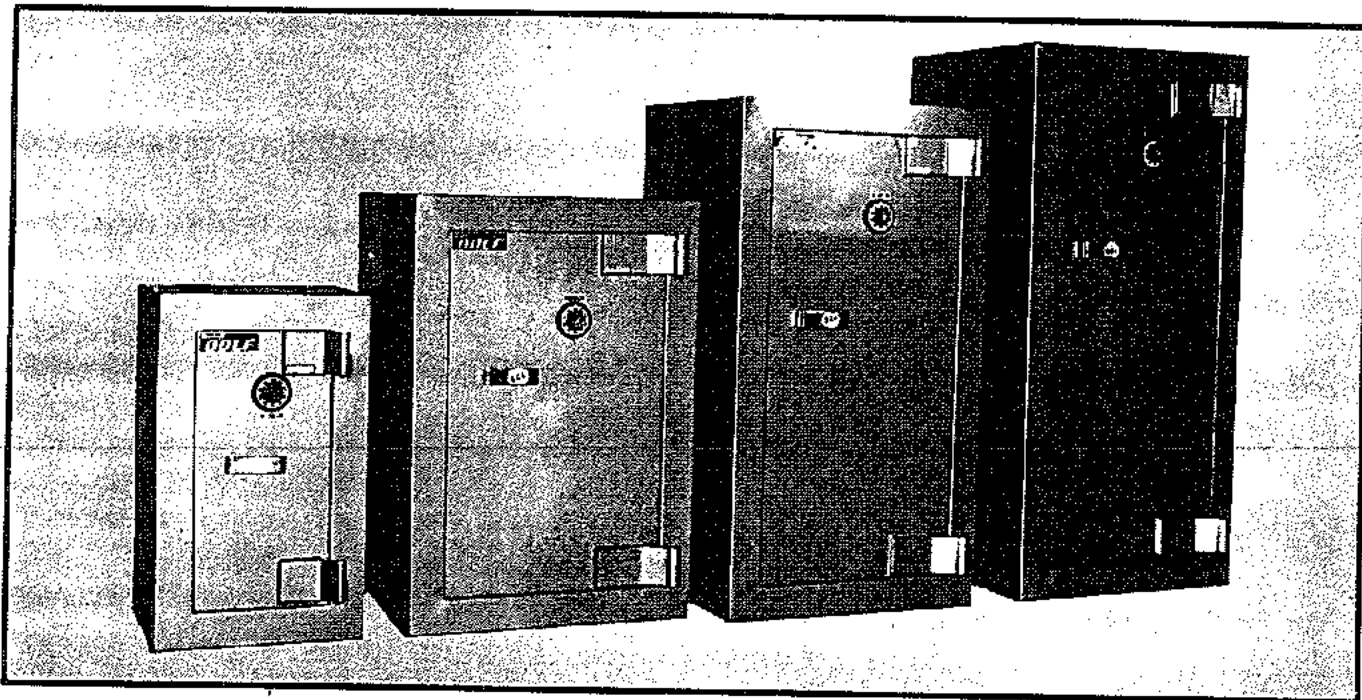

EMPIRE SAFE

DISTRIBUTED BY:

"CALL COLLECT"

THE BISCHOFF GOLF TL15 SAFE

This high quality safe offers six sided protection against most known methods of attack. It will afford an extremely high degree of protection against heavy hand tools, high speed drills, wedging, disc cutting and explosives.

DOOR:

The overall thickness of the door is 5''. The protective thickness of the doors outer slab is 1½'' alloy steel with ½'' of fire protective barrier material incorporated in the inspection cover.

The standard locking is one Underwriter's Laboratory Group 2 Combination Lock.

The GOLF TL15 incorporates two live relocking devices, which are both captive and protected by a massive hardened plate.

The inspection door also incorporated ½'' of fire protective barrier material giving this unit a full 6 sides of protection against fire.

BODY:

The body construction is the equivalent strength to the door being 4'' in overall thickness. Special reinforcement is built in to protect the bolt heads. The total strength of the anti-drill material is 14,000 pounds per square inch.

Interior Fittings:

Adjustable shelves and two lockable half width drawers fitted at the bottom of the safe.

The safes are finished either in dark grey or gold beige.

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			CUBIC INCH CAPACITY	APPROX. TOTAL WEIGHT
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH*		
GOLF CUB	13"	11½"	10"	22"	20"	21"	1495	700 lbs.
GOLF BS2	25"	11½"	10"	33½"	20"	21"	2875	1014 lbs.
GOLF BS3	25"	21"	18"	33½"	29½"	31"	9450	1906 lbs.
GOLF BS4	34"	21"	18"	43"	29½"	31"	12852	2246 lbs.
GOLF BS6	46"	21"	18"	55½"	29½"	31"	17388	2642 lbs.
GOLF BS7	54"	21"	18"	63½"	29½"	31"	20412	3056 lbs.

* Including Hinge

Bischoff Safe, Inc. has all the following labels: ULTL15, ULTL30, ULTRTL 15x6, ULTRTL 30x6