



CONQUEROR

A safe for large retail and commercial premises.

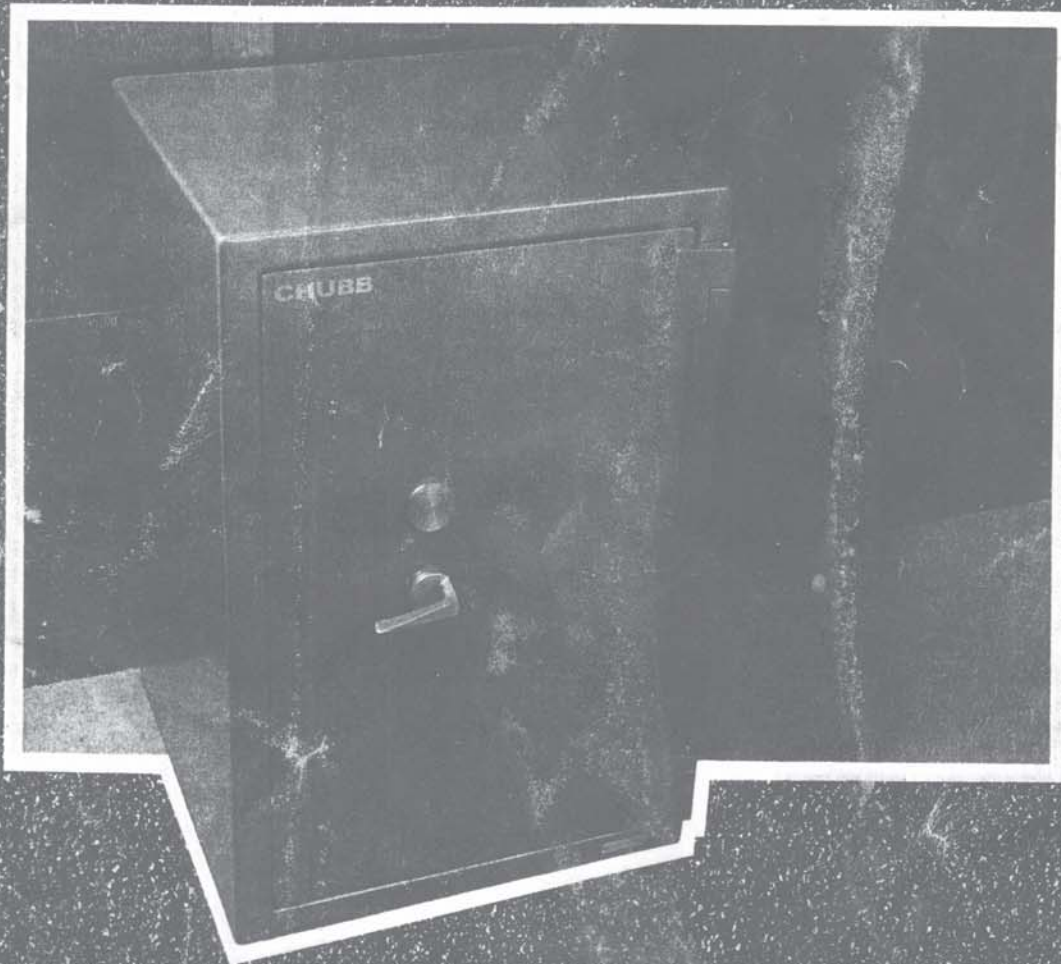

CHUBB



SAFE DESCRIPTION	0		1		2	
	mm	ins	mm	ins	mm	ins
A Clear outside height	568	22.4	628	24.8	718	28.3
B Clear outside width	528	20.8	528	20.8	668	26.3
C Clear outside depth	513	20.2	593	23.4	653	25.7
D Clear outside depth over furniture	588	23.2	668	26.4	728	28.7
E Furniture projection	75	3.0	75	3.0	75	3.0
F Clear inside height	400	15.7	460	18.1	550	21.6
G Clear inside width	360	14.2	360	14.2	500	19.7
H Clear inside depth	280	10.9	360	14.2	420	16.5
J Door swing	458	18.0	458	18.0	598	23.6
K Overall depth with door at 90°	989	39.0	1069	42.1	1269	50.0
L Overall width when door is fully open	966	38.1	966	38.1	1246	49.1
M Minimum overall width to give clear entry	850	33.5	850	33.5	1100	43.4
VOLUME						
	L	ft ³	L	ft ³	L	ft ³
Internal cubic capacity	40	1.41	60	2.12	116	4.1
WEIGHT						
	Kg	cwt	Kg	cwt	Kg	cwt
Weight nett	340	6.7	410	8.1	580	11.5
Weight gross (in packing case)	382	7.6	460	9.1	642	12.7
Weight - body only (without door)	279	5.5	346	6.8	485	9.6
LOADING						
	Kg/m ²	lb/ft ²	Kg/m ²	lb/ft ²	Kg/m ²	lb/ft ²
	1255	257	1309	268	1330	273
SHIPPING PARTICULARS						
	mm	ins	mm	ins	mm	ins
Case height	748	29.5	808	31.9	898	35.4
Case width	688	27.1	688	28.0	828	32.6
Case depth	748	29.5	828	32.6	888	35.0

Safes are made to commercial tolerances and the dimensions in the table are nominal.

FITTINGS	SIZES					
	0	1	2	3	4	5
Shelves	•	•	•	•	•	•
Lockable full-width drawers 100mm (4")	•	•	•	•	•	•
150mm (6")			•	•	•	•
Lockable half-width drawers 100mm (4")			•	•	•	•
150mm (6")			•	•	•	•
Lockable cupboards 220mm (8½")	•	•	•	•	•	•
300mm (12")		•	•	•	•	•
400mm (16")			•	•	•	•

All safes are fitted with vertical slotted racking so that all shelves and other fittings can be quickly and easily adjusted at 27mm intervals.

DEPOSIT FACILITIES	SIZES					
	0	1	2	3	4	5
Rotary drum trap - NT49, top only			•	•	•	•
Cash trap - NT52, top only			•	•	•	•
Drawer 2H - NT40, side, top and rear				•	•	•
Drawer 3H - side, top and rear				•	•	•
Hopper - NT42/48 side						•
top				•	•	•
rear					•	•

Application drawings must be requested to ensure compliance with site requirements.