



new from
EMPIRE the
security
people



EMPIRE
SERIES 60/FX
UL TL-30 SAFES
with SIX-SIDED PROTECTION

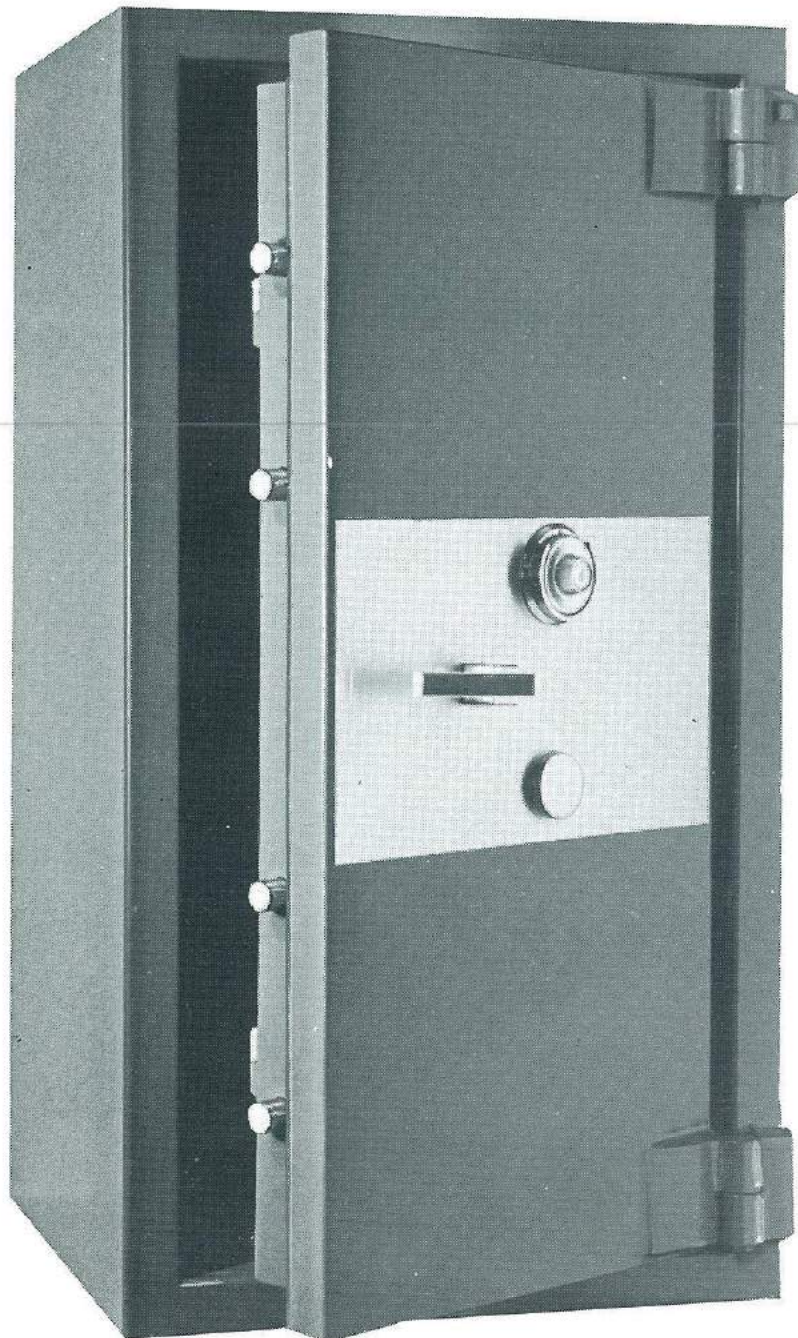

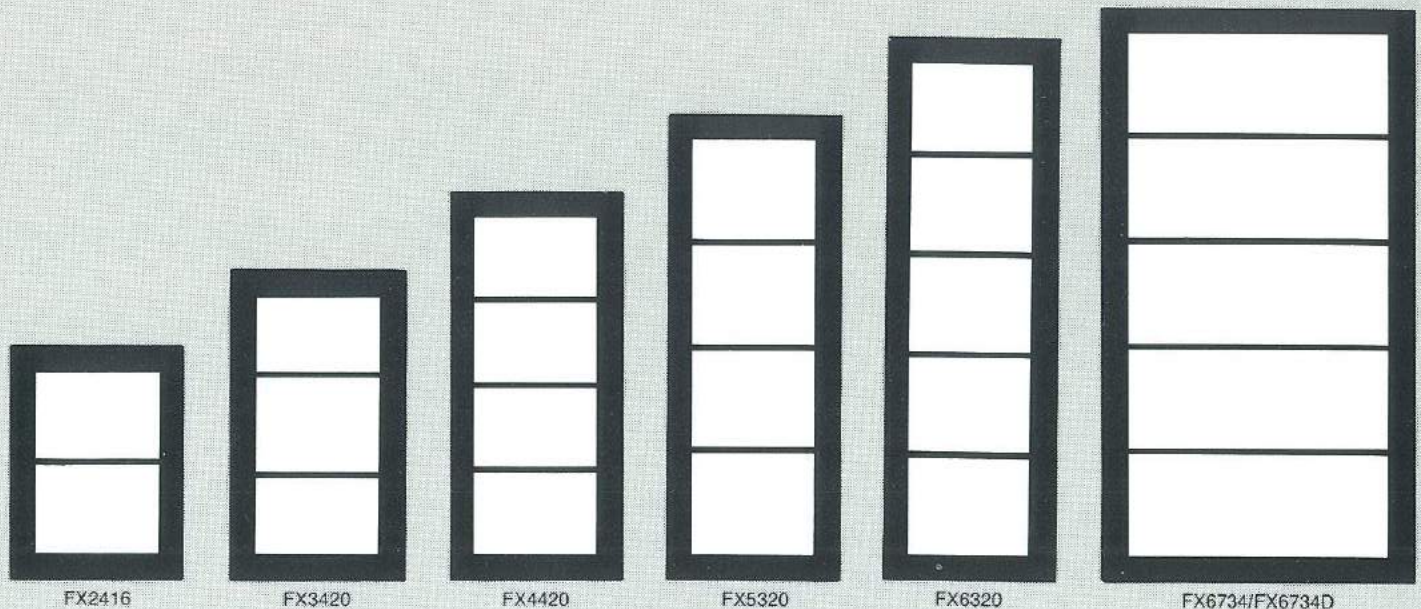

MODEL	INSIDE DIMEN.			OUTSIDE DIMEN. (OVERALL)			WEIGHT (LBS.)	CUBIC CAPACITY (IN.)
	H	W	D	H	W	D		
FX2416	23½"	16"	17"	29½"	22"	27"	1157	6,392
FX3420	33½"	20"	18¾"	39½"	26"	28¾"	1671	12,563
FX4420	43½"	20"	18¾"	49½"	26"	28¾"	1999	16,313
FX5320	53"	20"	18¾"	59"	26"	28¾"	2323	19,875
FX6320	63"	20"	18¾"	69"	26"	28¾"	2731	23,625
FX6734	67"	34"	20"	73"	40¼"	30¾"	3100	45,560
FX6734D	67"	34"	26"	73"	40¼"	36¾"	3939	59,228

Our aim is to constantly improve our products; we therefore reserve the right to alter specifications without prior notice.

EMPIRE Series 60/FX UL TL-30 SAFES with six-sided protection:

Empire has created a complete line of burglar and fire resistant safes designed to resist sophisticated tool attacks as well as offering torch resistance on all six sides. The unique size and weight characteristics of these safes give them the capability of being transported in elevators and located where floor load capacities are limited.

DOOR: (Overall Thickness – 5")

The door's barrier materials incorporate continuously welded outer and inner steel plates encasing a reinforced casting of PASCRETE, a highly dense refractory material. PASCRETE is incorporated in maximum security safes and provides excellent resistance to attack by many sophisticated tools as well as torches. To provide additional attack protection, the door is recessed into the body of the safe.

BODY: (Overall Thickness – 3")

The body is constructed of outer and inner steel plates encasing a casting of Pascrete, making up a complete torch, tool and fire resistant body.

BOLTWORK/LOCKING MECHANISM:

A three-way active attack resistant interlocking boltwork mechanism protects the top, bottom and opening sides of this safe. Fixed deadbolts secure the hinge side, completing the boltwork protection of the door. This attack resistant feature, together with other security features make this safe resistant to attacks with explosives.

LOCKING MECHANISM:

Each safe comes equipped with a Sargent and Greenleaf spy-proof combination lock. In addition, the safe comes equipped with a high security LaGard Keylock. This keylock provides not only increased security but can be utilized for convenient daytime access. The high-security keylock is supplied with 3 keys. Each key has a removable bit which secures onto a short stem for transport on a keychain off premises. A second combination lock can be substituted in lieu of the high security keylock.

RELOCKING MECHANISMS:

Both locks and vital locking areas are protected from access/penetration by a large tempered glass plate. Any tension producing attack on the plate will cause it to shatter, releasing crosslocking random relocking devices. These relocking devices secure the safe and prevent the door from opening, even if the combination and keylock are compromised. Further attacks on the combination or keylock may trigger additional mechanical relocking devices further securing the safe.

INTERIOR FITTINGS:

Each safe is equipped to accept adjustable shelves for the convenient storage of jewelry trays, displays, boxes, coins, cash or other items of value.

FINISH:

All safes are attractively finished with a smooth high quality two-tone grey lacquer paint.

FIRE RESISTANCE:

These safes were designed to offer up to 2 hour fire protection for paper documents.

INSURANCE:

These safes qualify for the UL TL-30(F) insurance rates for either Mercantile safe or Broadform Policies. Please advise your insurance company of the advanced six-sided features these safes offer. EMPIRE Series 60/FX UL TL-30 SAFES were manufactured for Empire Safe Company by Lord Safe Company, Australia, and offer features superior to other UL TL-30 safes manufactured by LORD.

EMPIRE Loss prevention specialists since 1904