


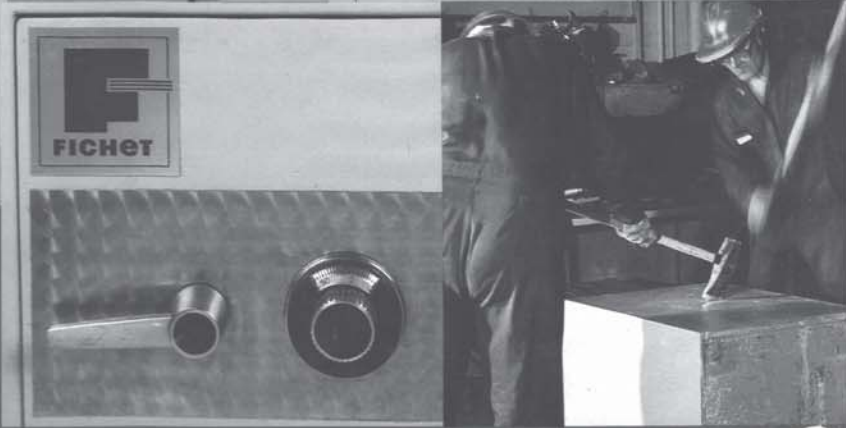
GIANT JEWELER SAFES



"TL30 Plus"

U.L.-LISTED TL-30

 **UNDERWRITERS
LABORATORIES
INC.**
LISTED
TOOL-RESISTANT SAFE
TL 30 BURGLARY No: _____



The GIANT JEWELER is a high-quality, composite safe which provides superior "TL30 Plus" protection.

Protection Against Tools:

Including drills, power saws, cutting wheels, sledge hammers, etc...earning the GIANT JEWELER its TL30 rating.

Plus:

- Six-sided construction and protection. U.L. testers attack only the front of the safes.
- Protection against torches. U.L. testers use only mechanical and electrical tools.
- Protection against fire, due to the fire-resistant properties of the walls and door.

Construction:

The JEWELER's body is made of 3" of a 6,000 PSI agglomerate sandwiched between the inner and outer steel plates. The JEWELER's door is over 4½" thick, with a 2" defense barrier. The barrier is composed of a 6,000 PSI agglomerate, backed by two ¼" drill-resistant hard plates, one of them made of manganese steel with a resistance higher than 120,000 PSI.

The GIANT JEWELER features a high-security locking system, many standard features and several available options.

Locking Features:

- A massive three-way boltwork with five heavy 1½" chrome plated bolts which engage into individual, reinforced housings in the body of the safe.
- Three dead-bolts on the hinge side.
- A U.L.-listed high-security combination lock with a million possible combinations, backed by an anti-drill security plate filled with stainless steel balls.
- An independent, spring-loaded relocker.


Other Standard Features:

- A stainless steel fascia plate.
- Adjustable shelves.
- A high-quality, textured finish.

Options:

- An additional lock, either a high-security key lock or a second combination lock.
- Internal lockers and drawers.
- Special interiors.

GIANT JEWELER SAFE SPECIFICATIONS

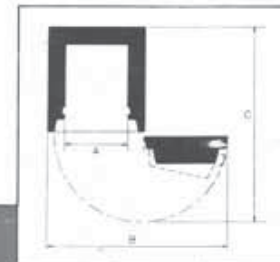

MODEL NUMBER	OUTSIDE			INSIDE			STORAGE CAPACITY	WEIGHT			
	H	W	D	H	W	D			A	B	C
110	30½"	24"	25½"	24"	17½"	16"	3.9 cu. ft.	1100 lbs.	17½"	36"	45"
235	42½"	26½"	29½"	36"	20"	20"	8.3 cu. ft.	1600 lbs.	20"	41"	51½"
300	42½"	32"	29½"	36"	25½"	20"	10.6 cu. ft.	1800 lbs.	25½"	52"	57"
315	54½"	26½"	29½"	48"	20"	20"	11.1 cu. ft.	2000 lbs.	20"	41"	51½"
395	66½"	26½"	29½"	60"	20"	20"	13.9 cu. ft.	2300 lbs.	20"	41"	51½"
420	56½"	32"	29½"	50"	25½"	20"	14.8 cu. ft.	2400 lbs.	25½"	52"	57"
585	76½"	32"	29½"	70"	25½"	20"	20.7 cu. ft.	2700 lbs.	25½"	52"	57"
1075	76½"	42½"	36"	70"	36"	26"	37.9 cu. ft.	3700 lbs.	36"	73"	73½"

Our aim is to constantly improve our products; we therefore reserve the right to alter specifications without prior notice.

