
ISM ULTRAVULT

THE SAFE THAT'S SIX TIMES SAFER!



THE FIRST UL® CERTIFIED TL-30x6

ULTRAVAULT TL-30x6

THE SAFE THAT'S SIX TIMES SAFER!

SPECIAL FEATURES

- TL-30x6. UL's newest rating. Six-side "tested protection" against concentrated attacks with hand and power tools, including abrasive cutting and coring equipment.
- High tech design provides added protection against oxy-acetylene torch attacks.
- *Note to insurance underwriters:*
The ISM UL TL-30x6 (ALL SIX SIDES TESTED) designation is FAR SUPERIOR when compared to safes with the TL-30 (DOOR TESTED ONLY) designation and are insurable for higher values.
- Fire Protection: One hour (minimum).

DOOR

- 6" overall thickness.
- This high security door is constructed of outer and inner steel plates enclosing a thick casting of Alchronite, ISM's unique torch and tool resistant defense material. Alchronite consists of a highly torch resistant cast aluminum alloy surrounding a drill resistant hardened steel grid.

BODY

- 3-1/2" uniform thickness.
- This high security body is constructed of outer and inner steel plates enclosing a dense monolithic composite casting, reinforced with an anti-penetration steel grid and "Z" shaped profiles. To resist concentrated attacks with sophisticated abrasive cutting and coring equipment, all walls are additionally protected with specially hardened steel alloy plates.
- Boltwork area further secured by strategic placement of hardened drill resistant inclusions.

LOCKS


- UL group 1 manipulation resistant combination lock (designed to defeat attack by automatic dialers).
- High security 12-lever keylock (with antiboroscope/fibre optic protection).
- Glass plate protection/random and thermal relocking devices.
- Locking mechanism includes special deflectors which protect against sophisticated drilling attacks.

BOLTWORK AND LOCKING MECHANISM

- Three-way active boltwork, plus double-action interlocking mechanism.
- Protection from side attacks on interlocking boltwork/locking mechanism.
- Bolt detention system that secures entire boltwork mechanism, protecting bolts when door is open.
- Glass plate protection on all locks and in all vital mechanism areas, so that, when locks are severely attacked, glass will shatter, activating a double relocking mechanism securing the boltwork in the locked position.

INTERIOR FITTINGS


- Adjustable, removable shelves (as illustrated).
- Up to 50% more jewelry tray storage capacity than previous models.

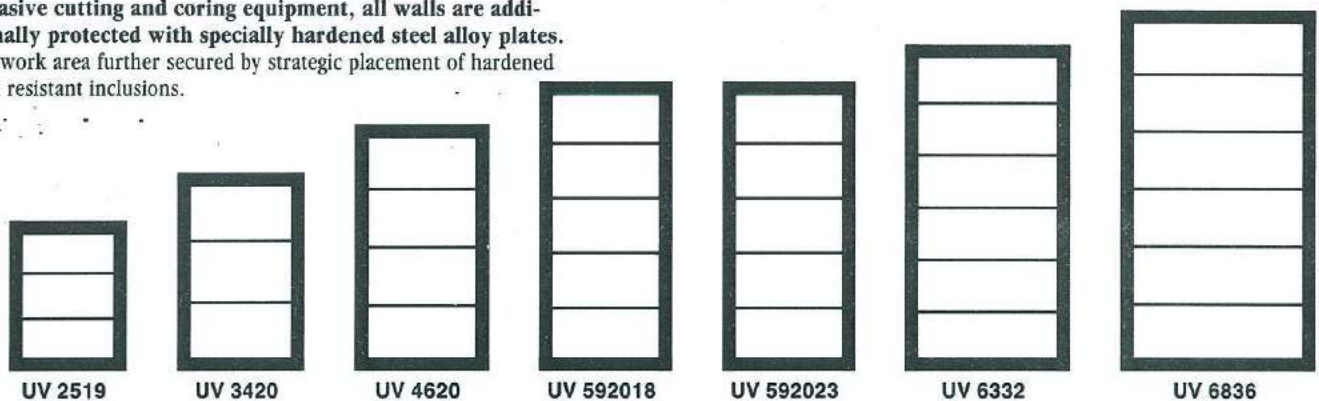

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			DOOR + BODY DIM.		VOLUME (CU. FT.)	BODY WEIGHT	TOTAL WEIGHT (LBS.)
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH *	90° - door open - 180°				
UV 2519	25	19	16	32	26	26	50.5*	50.5	4.5	1300	1630
UV 3420	34	20	17.5	41	27	28	53.25	51.5	7.1	1660	2098
UV 4620	46	20	17.5	53	27	28	53.25	51.5	9.6	1910	2480
UV 592018	59	20	17.5	66	27	28	53.25	51.5	12.3	2170	2900
UV 592023	59	20	23.25	66	27	33.25	58.50	51.5	16.0	2860	3590
UV 6332	63	32	18	70	39	28	66	76	21.0	3190	4050
UV 6836	68	36	26	75	43	36	77.25	84	36.8	3800	4840

*Add 2" to outside depth for hinge and 3" for handle

**Add 3" to outside depth for hinges and 1" to outside width for hinges for model 6836 only
ISM reserves the right to alter specifications without notice.

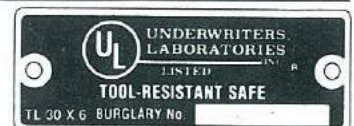

EMPIRE SAFE

6 EAST 39th STREET, NEW YORK, N.Y. 10016

(212) 684-2255

FAX: (212) 684-5550